

# Outdoor IR Bullet Network Camera

MODEL: VIGI C320I (2.8/4/6mm)  
VIGI C330I (2.8/4/6mm)  
VIGI C340I (2.8/4/6mm)



**H.265+**

2/3/4MP



Human & Vehicle  
Classification



Smart Detection



IP67 Weatherproof



Built-In Microphone




Remote Monitoring

## // Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.




## // Smart Detection



**Intrusion  
Detection**



**Line-Crossing  
Detection**



**Object Removal  
Detection**



**Object Abandoned  
Detection**



**Region Entering  
Detection**



**Region Exiting  
Detection**



**Motion  
Detection**



**Camera  
Tampering**

## // SmartVid



### **Smart IR**

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



### **Wide Dynamic Range**

Adjusts for lighting contrast to minimize shadowing effects and renders images true to life.




### **3D DNR**

Removes abnormal pixelation to provide clearer video and eliminate distortion.

## // VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

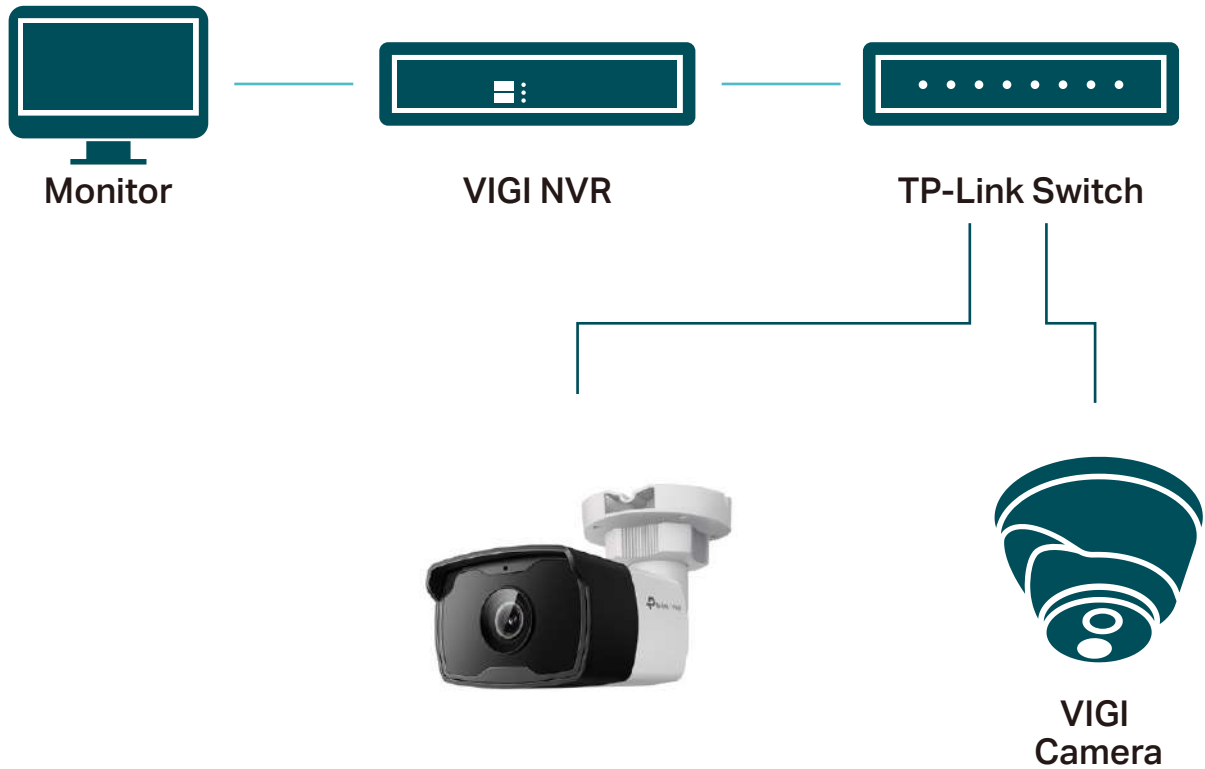

## // Flexible Installation

Find the perfect vantage point by simply securing your camera to the ceiling, wall, or pole.

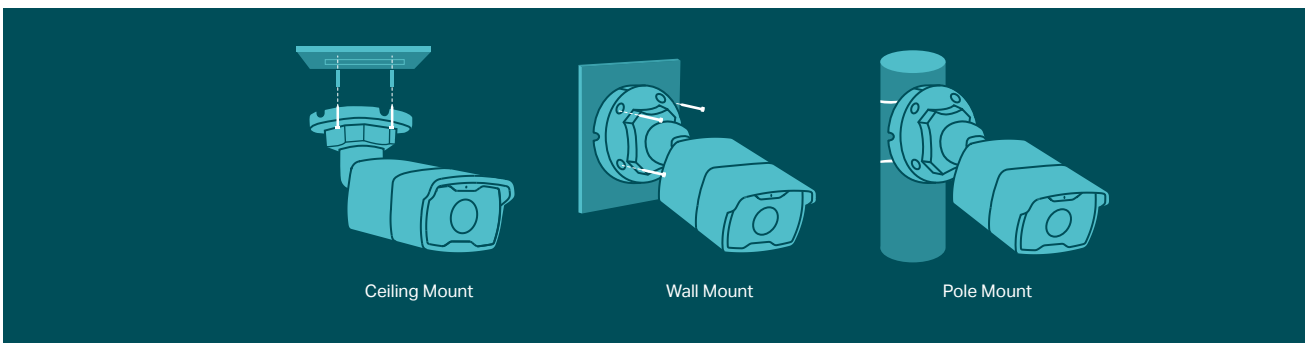

# // Specifications

Camera			
Product Model	VIGI C320I	VIGI C330I	VIGI C340I
Image Sensor	1/3" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/3" Progressive Scan CMOS
Slow Shutter	Yes		
Min. Illumination	Color: 0.01 Lux; 0 Lux with IR		
Day & Night Mechanism	IR Cut Filter		
Day/Night Switch	Unified/ Scheduled/ Auto		
Lens			
Focal length	2.8 mm/4 mm/6 mm	2.8 mm/4 mm/6 mm	2.8 mm/4 mm/6 mm
Aperture	2.8mm: F2.2 4mm: F2.0 6mm: F2.0	2.8mm: F2.2 4mm: F2.0 6mm: F2.0	2.8mm: F2.2 4mm: F2.0 6mm: F2.0
Focus	Fixed		
FOV	2.8mm: 88.2°/48.6°/106.5° (H/V/D) 4mm: 75.2°/40.8°/88.3° (H/V/D) 6mm: 49.8°/27.6°/57.7° (H/V/D)	2.8mm: 97.8°/52.9°/117.9° (H/V/D) 4mm: 82.8°/44.5°/98.1° (H/V/D) 6mm: 54.5°/30.0°/63.2° (H/V/D)	2.8mm: 88.8°/48.9°/106.5° (H/V/D) 4mm: 75.2°/40.8°/88.3° (H/V/D) 6mm: 49.8°/27.6°/57.7° (H/V/D)
Lens Mount	M12	M12	M12
DORI Distance	2.8 mm: Detect: 45 m (149 ft) Observe: 19 m (62 ft) Recognize: 9 m (30 ft) Identify: 5 m (15 ft) 4 mm: Detect: 60 m (198 ft) Observe: 25 m (83 ft) Recognize: 12 m (40 ft) Identify: 6 m (20 ft) 6 mm: Detect: 91 m (297 ft) Observe: 38 m (124 ft) Recognize: 18 m (59 ft) Identify: 9 m (30 ft)	2.8 mm: Detect: 49 m (161 ft) Observe: 20 m (67 ft) Recognize: 10 m (32 ft) Identify: 5 m (16 ft) 4 mm: Detect: 65 m (214 ft) Observe: 27 m (89 ft) Recognize: 13 m (43 ft) Identify: 7 m (21 ft) 6 mm: Detect: 98 m (321 ft) Observe: 41 m (134 ft) Recognize: 20 m (64 ft) Identify: 10 m (32 ft)	2.8 mm: Detect: 60 m (197 ft) Observe: 25 m (82 ft) Recognize: 12 m (39 ft) Identify: 6 m (20 ft) 4 mm: Detect: 80 m (262 ft) Observe: 33 m (109 ft) Recognize: 16 m (52 ft) Identify: 8 m (26 ft) 6 mm: Detect: 120 m (394 ft) Observe: 50 m (164 ft) Recognize: 24 m (79 ft) Identify: 12 m (39 ft)
Angle Adjustment (Manual)			
Range	<ul style="list-style-type: none"> <li>• Pan: 0° to 360°</li> <li>• Tilt: 0° to 90°</li> <li>• Rotation: 0° to 360°</li> </ul>		

## Illuminator

IR LED	<ul style="list-style-type: none"> <li>• Quantity: 2</li> <li>• Range: 50m</li> <li>• Wavelength: 850nm</li> </ul>
White LED	N/A
Illuminator On/Off Control	Auto/Scheduled/Always on/Always off

## Video

Max. Resolution	2MP (1920 × 1080)	3MP (2304 × 1296)	4MP (2560 × 1440)
Main Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 1920x1080, 1280x960, 1280x720	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2304x1296, 2048x1280, 1920x1080, 1280x720	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720
Sub-Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 704x576, 640x480, 352x288, 320x240	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 704x576, 640x480, 352x288, 320x240	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 640x480, 352x288, 320x240
Bit Rate Control	CBR, VBR		
Video Compression	<ul style="list-style-type: none"> <li>• Main Stream: H.265+/H.265/H.264+/H.264</li> <li>• Sub-Stream: H.265/H.264</li> </ul>		
H.264 Type	High Profile		
H.264+	Main Stream Supported		
H.265 Type	Main Profile		
H.265+	Main Stream Supported		
Video Bit Rate	<ul style="list-style-type: none"> <li>• Main Stream: 256 Kbps to 4 Mbps</li> <li>• Sub-Stream: 64 Kbps to 512 Kbps</li> </ul>		

## Image

Image Settings	<ul style="list-style-type: none"> <li>• Mirror</li> <li>• Brightness</li> <li>• Contrast</li> <li>• Saturation</li> <li>• Sharpness</li> <li>• Exposure</li> <li>• WDR</li> <li>• White Balance</li> <li>• Prevent Overexposure to Infrared Light</li> <li>• HLC Adjustable by Client Software</li> <li>• Rotation(90°/270°)</li> </ul>
----------------	--

Image Enhancement	BLC/3D DNR/HLC/SmartIR
Wide Dynamic Range	DWDR
SNR	≥ 52 dB
Image Parameters Switch	Yes
Privacy Mask	Up to 4 Masks
ROI	1 Region
OSD Setting	Yes

## Audio

Audio Communication	N/A
Audio Input	Yes
Audio Output	N/A
Audio Compression	Yes
Audio Sampling Rate	8KHz
Environment Noise Filtering	Yes
Audio Bit Rate	64 Kbps(G.711 alaw)

## Network

Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6 (VIGI C320I does not support IPv6), ARP
ONVIF	Yes
API	Open Network Video Interface (Profile S)
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Cloud	Yes
Client	VIGI App, VIGI Security Manager, VIGI NVR, Web
Web Browser	<ul style="list-style-type: none"> <li>• Google Chrome® 57 and above</li> <li>• Firefox® 52 and above</li> <li>• Safari® 11 and above</li> <li>• Microsoft® Edge 91 and above</li> </ul>

## Alarm and Event Management

Smart Event	<ul style="list-style-type: none"> <li>• Human &amp; Vehicle Classification</li> <li>• Intrusion Detection</li> <li>• Line-Crossing Detection</li> <li>• Region Entering Detection</li> <li>• Region Exiting Detection</li> <li>• Object Abandoned/Removal Detection</li> <li>• Abnormal Sound Detection</li> <li>• People Detection</li> <li>• Vehicle Detection</li> </ul>
-------------	--

Basic Event	<ul style="list-style-type: none"> <li>• Motion Detection</li> <li>• Video Tampering Detection</li> <li>• Exception ( Illegal Login)</li> </ul>		
Alarm Linkage	Message Push		
Linkage Method	N/A		
Output Notification	Message Push		
<b>Interface</b>			
Network Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port		
Alarm	N/A		
Reset Button	N/A		
Power	DC Power Port (VIGI C320I does not have DC power port)		
On-board Storage	N/A		
Built-in Microphone	Yes; Records Anything Going on within a 15-ft Radius of the Camera		
Built-in Speaker	N/A		
Audio	N/A		
<b>General</b>			
Operating Temperature	-30–60 °C		
Power Supply	PoE (802.3af/at, class 0)	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)
Power Consumption	PoE: class 0	12V DC: Max 5W PoE: class 0	12V DC: Max 5W PoE: class 0
Ingression Protection	IP67		
Material	Plastic		
Product Dimensions	78.5 × 188.03 × 71.55 mm (3.09 × 7.40 × 2.82 in)		
Certification	CE/BSMI/VCCI/ONVIF		

## Build Features



\* VIGI C320I does not have DC power port.

Specifications are subject to change without notice and can be found at [www.tp-link.com](http://www.tp-link.com).

©2024 TP-Link