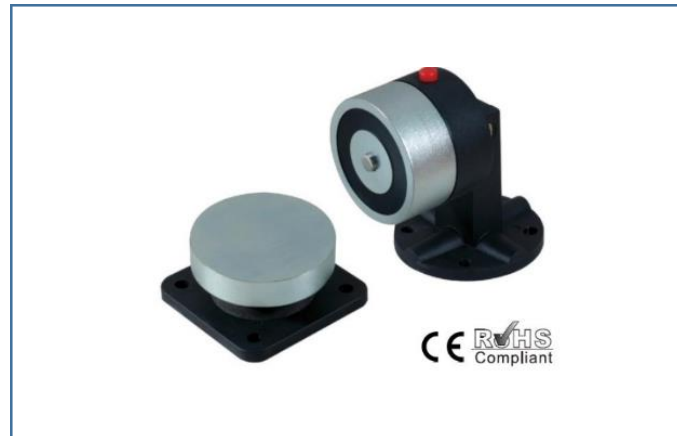


LK133-1

Fail-Safe Magnetic Door Holder Floor Mount

**Specification**

Operation current	96mA@12V 49mA@24V	
Power saving function	Available	
Door Close Delay Time	X	
Lock status sensor	NO & NC	
Power Supply	DC 12V or DC24V \pm 15%	
Application	Fire door and all types of 90° door	
Holding forces	145lbs (65Kg)	
Immediate Power Off push button	Available	
Demagnetizer	Instant demagnetizer when power is off	
Mounting methods	Floor or wall mounting	
Weight	700g (included wrapping)	